

# Chatbox Duo

## Nursery for nascent ideas

One-on-ones thrive here. A safe space for private conversations. A quiet bubble for chasing and sharing ideas.



1-2 people



### Essential quality

With a sole focus on essential features, you enjoy world-class quality without breaking the bank.



### Quiet

Best-in-class soundproofing. Blocks 34dB outside noise, 31dB inside speech. Office-tested, ISO-approved in the laboratory.



### Comfortable

Ergonomic, quiet, echo-free, and speech-optimized. Automated LEDs and ventilation. Over twice the standard airflow rate.



### Easy to relocate

Add-on mobility kit for in-office relocation. Easy reassembly for moving offices.



### Quick assembly

Thanks to its smart prefabricated design, it sets up in 90 minutes. Disassembly and reassembly are just as easy.



### Endless customization

Swap side skins and cover trims with a snap of a magnet. Choose from a variety of colors, fabrics, and furnishing options.



### Sustainable

Fully renewable with a 20+ year lifespan. Designed sustainably across materials, production, and impact on surrounding environments.

### Standard exterior colors



Black



White

### Standard interior color



Dark gray

### Colour collection for additional price



Cotton



Opal



Marshmallow



Myosotis



Paprika



Azurite







Storm Gray



Frozen Blue



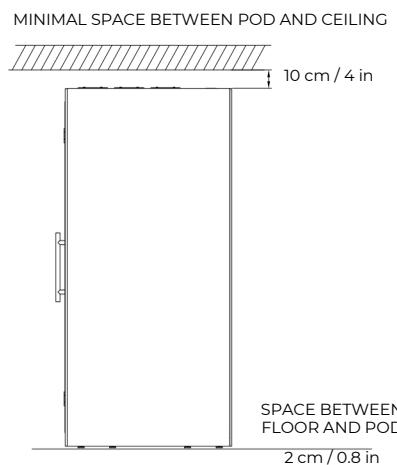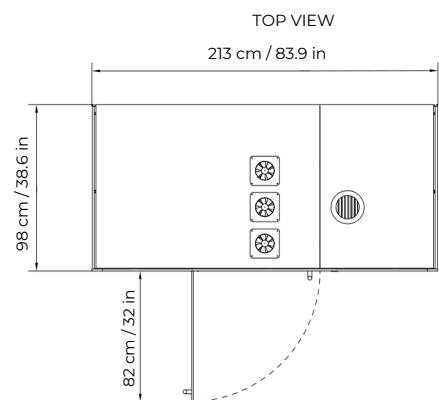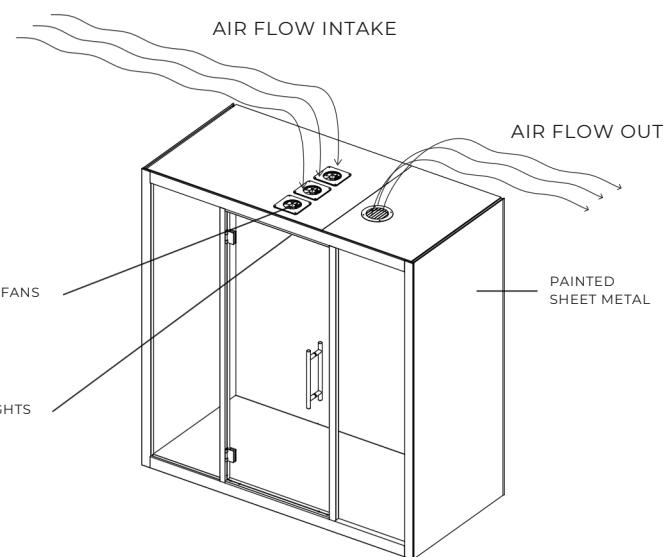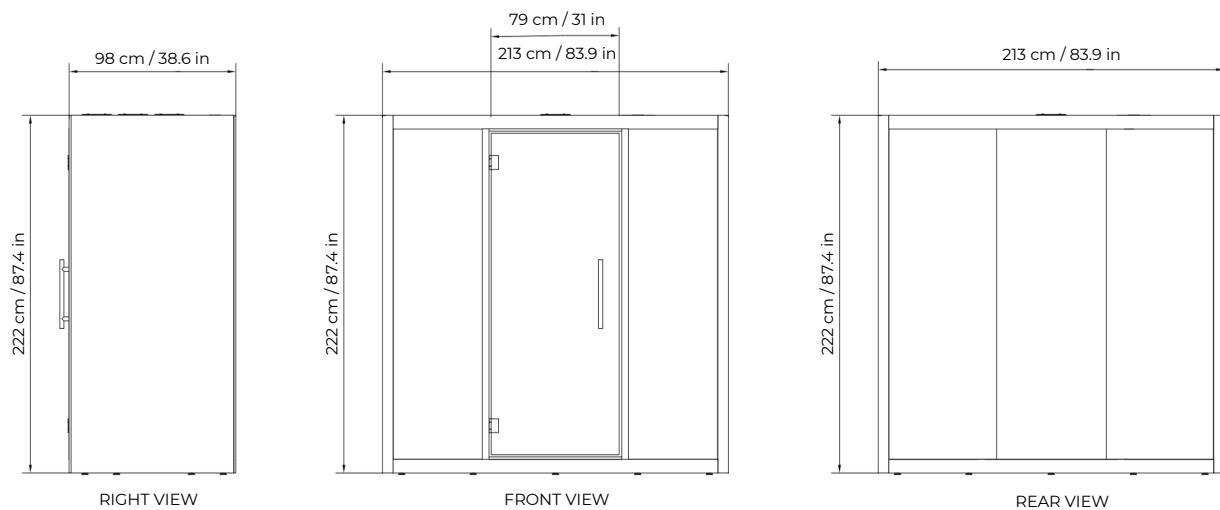

# Chatbox Duo technical specification

## GENERAL PRODUCT INFO

Exterior size (W×D×H)	213 × 98 × 222 cm / 83.9 × 38.6 × 87.4 in
Interior size (W×D×H)	200 × 91 × 204 cm / 78.7 × 35.8 × 80.3 in
Weight (net)	490 kg / 1080 lb
Door handedness	left- and right-handed door in one
Air ventilation	low consumption air circulation system (max 5.1 W)
Air flow	air circulation speed is more than 55 l/s (198 m <sup>3</sup> /h) (117 ft <sup>3</sup> /min)
Lighting	energy-efficient LED light (28 W, 4000 K, 2240 lm)
Power outlets	Option one: 2 x 110-240 V (10 A) Option two: 110-240 V (10 A) + USB-A+C
Power cord	3 m / 9 ft 10 in
Exterior material	painted sheet metal
Glass	sound control laminated safety glass
Floor	antistatic and stain resistant low loop
Acoustic surfaces	pile carpet for public spaces, EN 1307
Adjustable glides	acoustic EchoFree panel for easy leveling from inside the booth

## CERTIFICATION

Electrical safety	CE-mark
Fire safety	Class A according to UL 723, ASTM E84, ASTM E162 (walls and ceiling)
Emissions	Indoor Advantage™ Gold certified by SCS Global Services
Sound reduction	29,4 db (class B according to ISO 23351-1)
Airborne sound insulation R'w	34 dB according to ISO 16283-1 and ISO 717-1, measured on site by an accredited specialist
Sound transmission class STC	34 dB according to ASTM E90, measured on site by an accredited specialist




## Chatbox Duo features



Retractable coat/bag hook



Control panel



Occupancy light



Mobility kit

### EXTRA FEATURE

Retractable coat/bag hook A practical and nice-looking foldable hook for coat or bag

Control panel Airflow dimmer, light brightness dimmer, light temperature selection and controls for optional extras

### Occupancy light

Mobility kit Set of detachable casters for moving booths.  
Can be used for all Chatbox models.

## Options for surfaces

### Exterior colors collection



White



Black



Cotton



Opal



Marshmallow



Myosotis



Paprika



Azurite



Storm Gray


Frozen Blue  
Whiteboard  
paint


### Standard wall and ceiling



Dark gray

### Standard floor



Dark gray

### Standard profile



Black

