
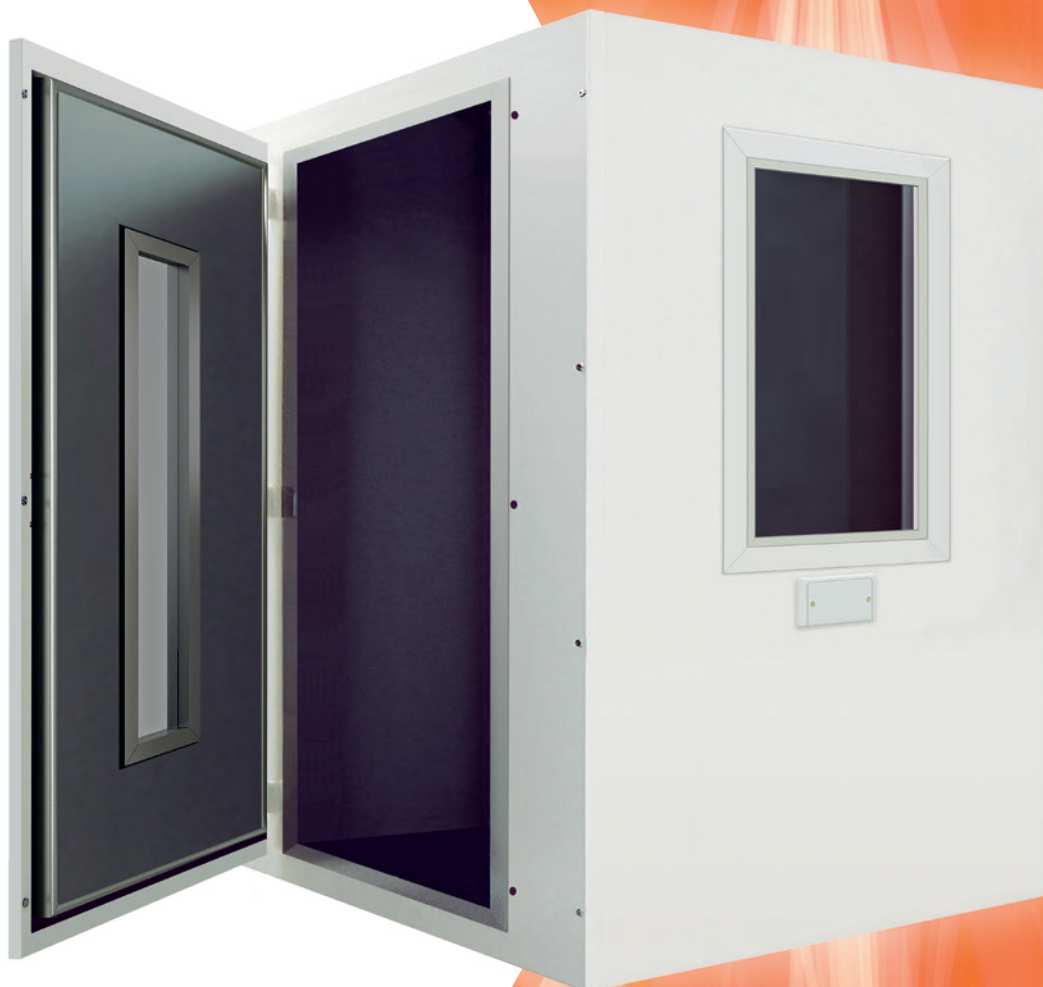


AirOne

NEW MODEL

puma[®]
acoustics

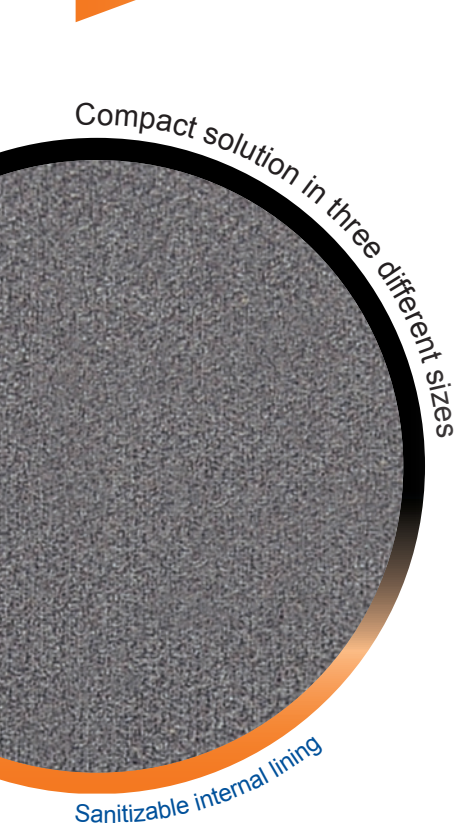

All our booths offer the best of Italian design

- New high-performance solution
- Innovative interior materials for excellent acoustics
- Quick and easy installation
- Reversible door with magnetic closure
- Available in a DIY assembly kit
- Integrated silenced ventilation
- Vertical window on door (optional)

AirOne 124x129 with vertical window on door (optional)

CE



AirOne 96x96



AirOne 110x110

Technical Characteristics

Code	Outside dimensions (LxWxH)	Inside dimensions (LxWxH)	Floor area	Weight
ONE96x96	96 x 96 x 210 cm	81 x 83 x 190 cm	0.92 m ²	220 kg
ONE110x110	110 x 110 x 205 cm	95 x 97 x 185 cm	1.21 m ²	275 kg
ONE124x129	124 x 129 x 205 cm	109 x 116 x 185 cm	1.60 m ²	330 kg

Application

AirOne is a high-performance booth, characterized by an excellent level of soundproofing.

Particularly suitable for voice recording, podcasting, or for people play small instruments and have limited space.

Available in three sizes to better adapt to different space and usage requirements.

AirOne96x96, compact and handy, it's the perfect booth for environments with limited space, also for temporary installations thanks to its high flexibility and ease of movement (available with an optional castors kit).

AirOne110x110, it offers a more comfortable space, also allowing access for wheelchair users without the need for ramps.

AirOne124x129, increased in size, it's the ideal solution for individual use, even during an extended stay inside; it's also possible to create a functional area to accommodate small equipment, such as PCs, mini-mixers, and similar devices.

Also this version guarantees easy access for wheelchair users without the need of ramps.

Exterior

The exterior finishing is made of highly durable and washable fireproof panels.

Interior

The interior finishing is composed of an innovative sound-absorbing fibre covered in acoustic material that is sanitizable, fireproof, highly durable, providing the booth with perfect acoustics.

Internal sanitification

The internal finishes are sanitizable according with the I.S.S. (Ministry of Health) directives by using a wet cloth and colorless disinfectants by spraying at a distance of 30 cm.

Door

The door, with a magnetic lock, is reversible. The opening (right or left) can be decided during assembly and changed in 5 minutes. Useful door clearance:

AirOne96x96 cm 55 x 185 (WxH)

AirOne110x110 cm 76.5 x 188 (WxH) with internal floor at threshold level.

AirOne124x129 cm 80 x 188 (WxH) with internal floor at threshold level.

Window

The window is made of special double safety glass.

Dimensions:

AirOne96x96 cm 52 x 52 (WxH)

AirOne110x110 cm 60 x 80 (WxH)

AirOne124x129 cm 60 x 80 (WxH).

Floor

The floor is layered with different materials and it stands on anti-vibration adjustable feet. Finishing: technical, antistatic, fireproof, washable carpet.

Instrumentation connection

Instrument cables pass seamlessly through an innovative, soundproof connection panel that doesn't require jack sockets. Any instrument can be connected immediately.

Electrical system

Lighting is provided by a low-energy light. Power supply: 230 V. - 50/60 Hz.

Ventilation system

An integrated, silent, forced-air ventilation system ensures constant air exchange.

Window on door (optional)

A vertical window is available as an option on the door, for greater natural lighting and a view of the outside environment.



Sound insulation The AirOne booth has been tested at the Technical-Physics Laboratory C.S.I. s.p.a. (Milano, Italy) accredited by ACCREDIA

Acoustic insulation									
Hertz	125	250	500	1000	2000	3150	4000	6300	8000
dB	21.7	25.6	32.6	36.2	34.0	37.7	41.1	41.6	43.0

Optional on request

- Vertical window on door
- External folding table (79x50 cm)
- 4-castors kit (2 with brakes)
- Folding internal table (79x32 cm)
- Voltage adjustment (110V)
- PVC floor

Installation

Quick and easy to install with a DIY assembly kit, no specialized personnel required; simply follow the instructions. Thanks to its light weight and compact size, it can be installed in just a few minutes.

Notes

The materials are fireproof and self extinguishing at the origin. Specifications are subject to change without notice. Warranty: as per law.

Packaging and delivery

The booth is shipped disassembled in a crate packaged according to ISPM standards and with a DIY installation kit or, upon request, transported and assembled by our specialized staff.

Standards

UNI EN ISO 11957
UNI EN ISO 717-1

